

Fig. 1



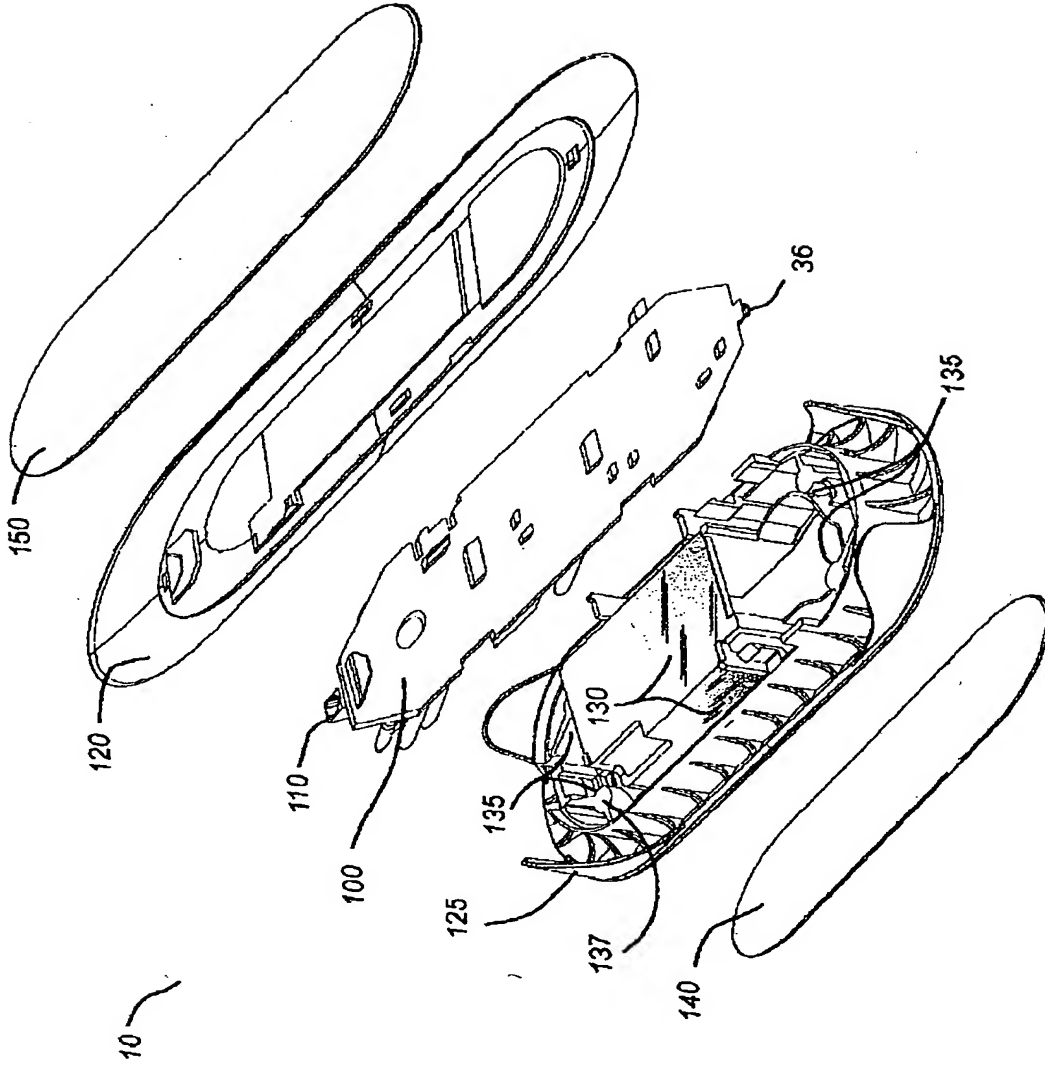


Fig. 2

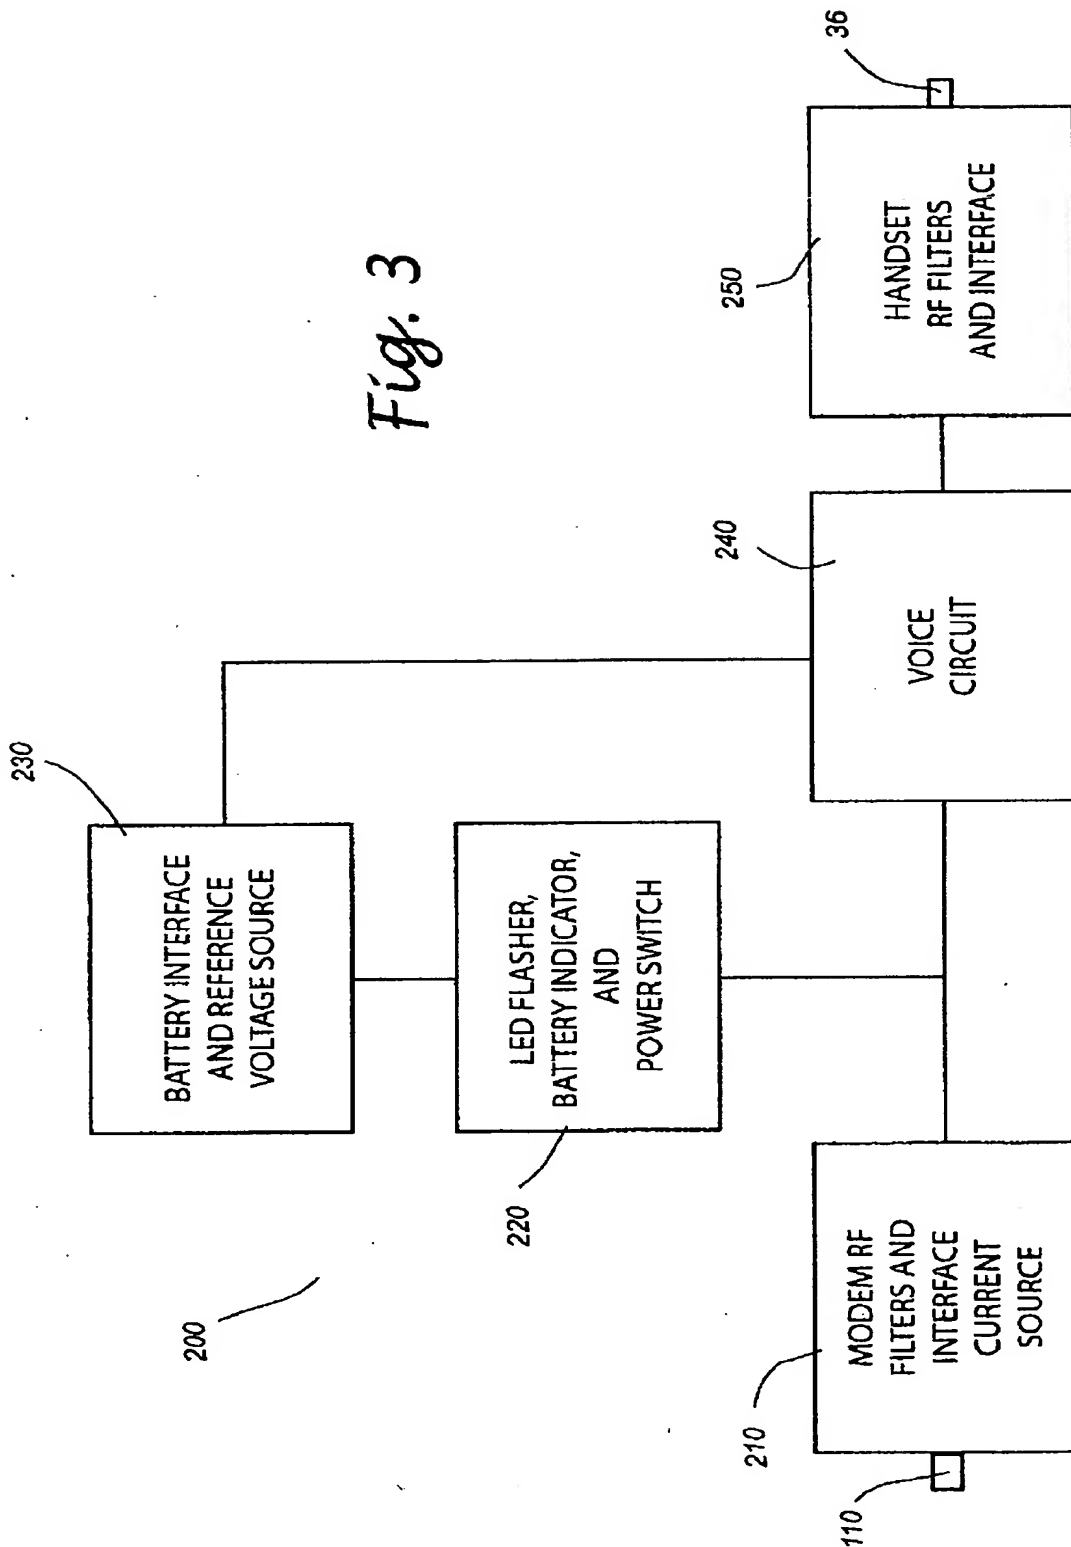

20,020" 8892,001

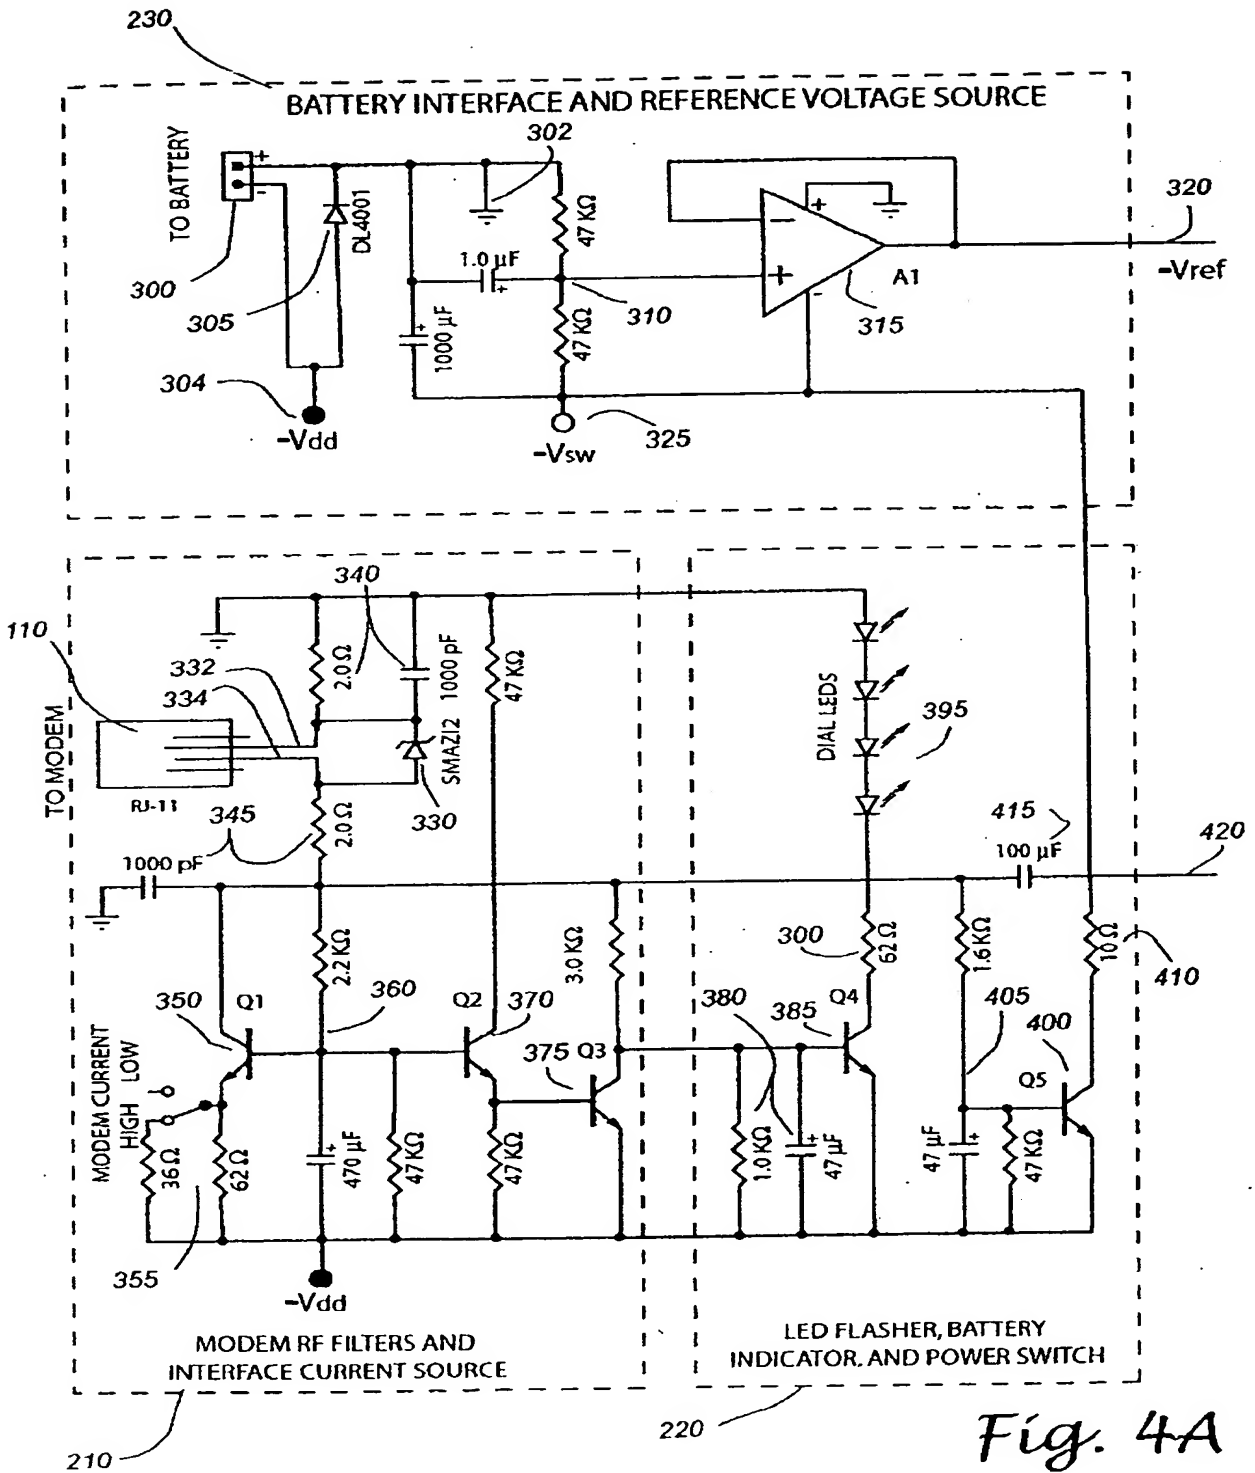

202020" E92200T

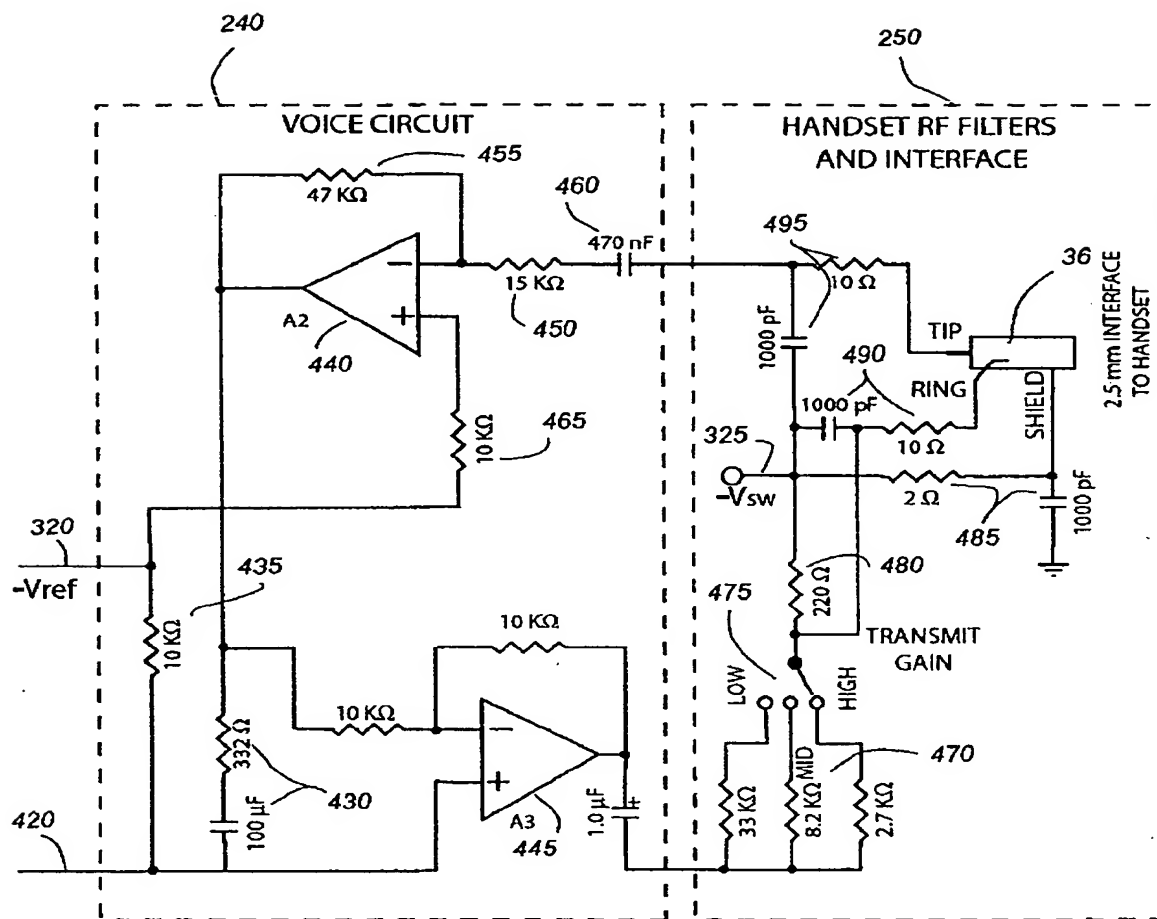


Fig. 4B

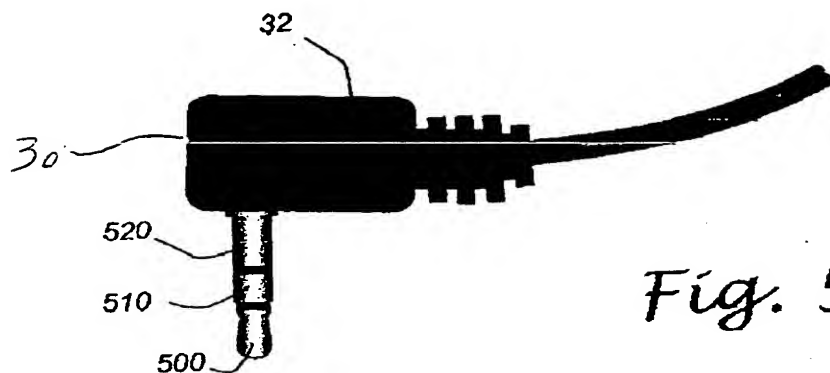


Fig. 5

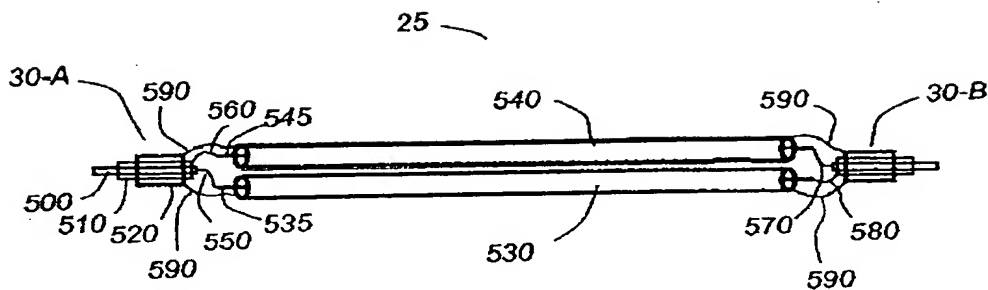


Fig. 6

CONNECTION TABLE

| JACK 30-A | SHIELDED CONDUCTOR | JACK 30-B |
|-----------|--------------------|-----------|
| TIP | NO. 1 - CENTER | RING |
| SHIELD | NO. 1 - SHIELD | SHIELD |
| RING | NO. 2 - CENTER | TIP |
| SHIELD | NO. 2 - SHIELD | SHIELD |

Fig. 7